




(EN) Temperature
 (FR) Température
 (DE) Temperatur
 (IT) Temperatura
 (ES) Temperatura
 (NL) Temperatuur
 (DK) Temperatur
 (S) Temperatur




(EN) Storage
 (FR) Stockage
 (DE) Lagerung
 (IT) Conservazione
 (ES) Almacenamiento
 (NL) Berging
 (DK) Opbevaring
 (S) Förvaring

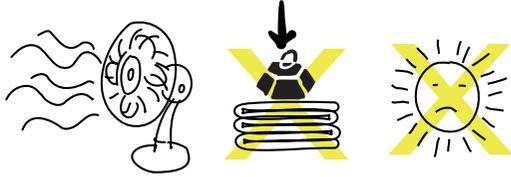


(EN) Dangerous products
 (FR) Produits dangereux
 (DE) Gefährliche Produkte
 (IT) Prodotti pericolosi

(ES) Productos peligrosos
 (NL) Gevaarlijke producten
 (DK) Farlige væsker
 (S) Farliga produkter

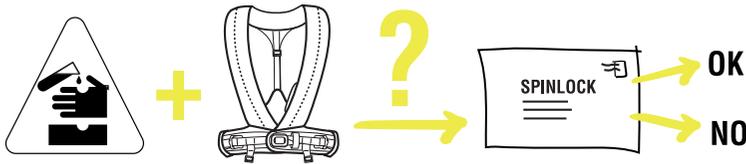


(EN) Cleaning / Disinfection
 (FR) Nettoyage / Désinfection
 (DE) Reinigung / Desinfektion
 (IT) Pulizia / Disinfezione

(ES) Limpieza / Desinfección
 (NL) Reiniging / Ontsmetting
 (DK) Rengøres / Decifceres
 (S) Rengöring/ Desinfektion

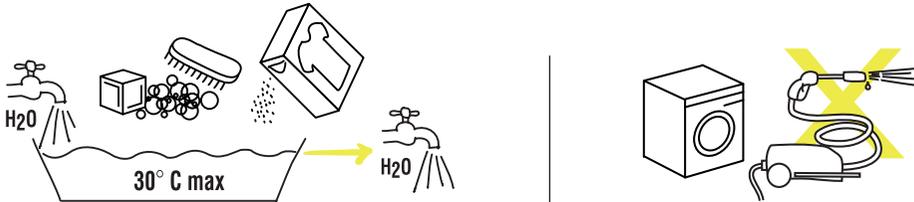

(EN) Drying
 (FR) Séchage
 (DE) Trocknen
 (IT) Asciugamento


(ES) Secado
 (NL) Het drogen
 (DK) Tørrer
 (S) Torkning

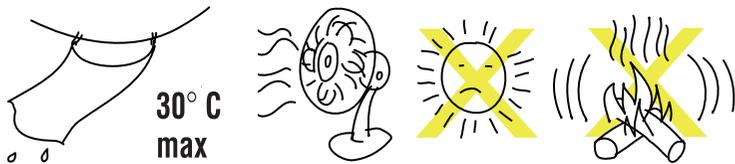

spinlock
 deckware series

deck pro™

- Lightweight ergonomic deck safety harness
- Adjustable rapid fit with “DoubleBack” buckle technology
- Front opening
- EN 1095/ISO 12401 approved deck harness

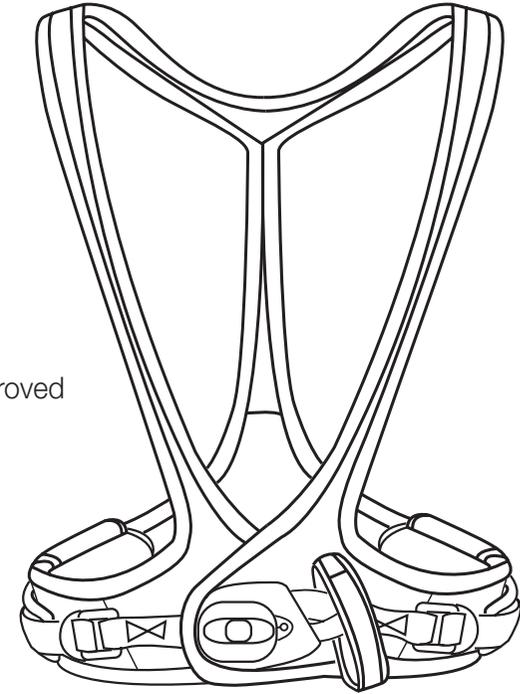

WARNING: WHEN NOT CORRECTLY FITTED, THIS PRODUCT MAY NOT PERFORM AS A HARNESS AND MAY CAUSE SERIOUS DANGER.

IMPORTANT: DO NOT REMOVE PRIOR TO SALE.
 It is essential you read these instructions before using your Deckpro harness.

CE
 EN 1095/ISO 12401



For users at least 16 years of age and 50 kg.

Spinlock Ltd 41 Birmingham Road PO31 7BH Cowes UK

CE

3R395A



The Spinlock Deckpro harness is extensively protected under various National, European and International Patents and Design Rights owned by Spinlock Ltd.

For continuously updated user guidance go to www.spinlock.co.uk
 Printed in the UK



deck pro™
www.spinlock.co.uk

Fitting and adjusting


A B C D

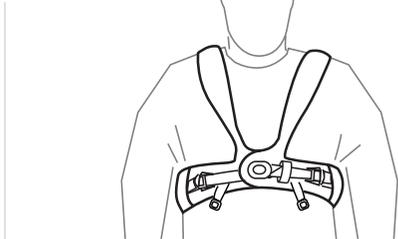



A B C D




A B C D

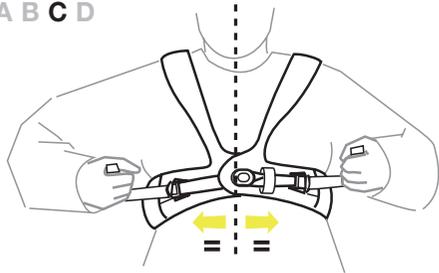


A B C D

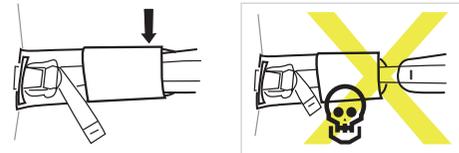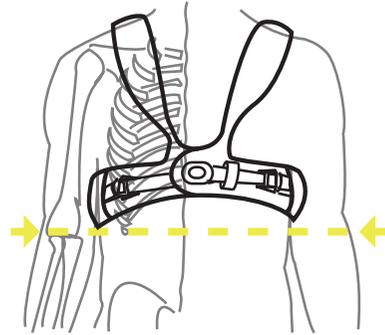

Tightening / loosening


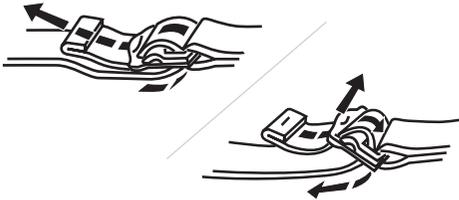


Threading buckles

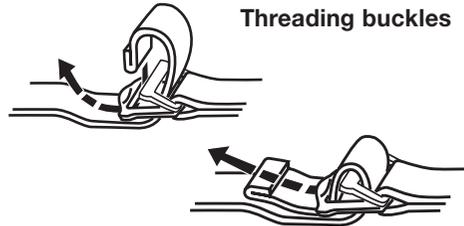

Fitting legstraps

Back of Deckvest

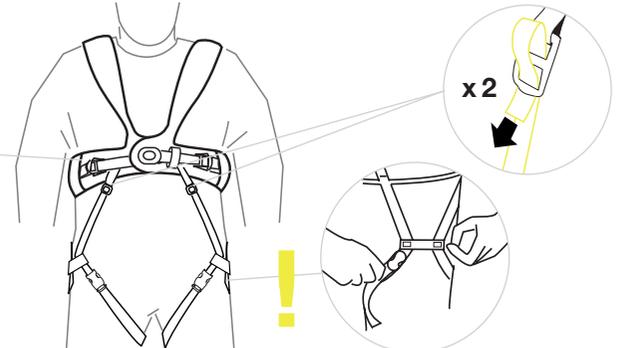

(EN) English

Instructions for use

FITTING ADJUSTMENTS (PAGES 3 & 4)

A. Put on as jacket, B. Fasten Button, C. Pull chest belt tight – it is unsafe to wear this harness loose. D. Position so that chest belt is above lowest point of rib cage. If required attach legstraps - pass strap through legs before fastening plastic buckle on front.

HOW TO USE (PAGES 5 & 6)

A. Anchorage point should be located at the centre of the chest. Note: safety line is for illustration only. Ensure no sharp edges on safety line attachment point. Use with approved safety line only.

Guidance

Attach to Jackstays/fixes eyes.

Anchorage points shall be able to withstand forces of more than 1 tonne. Never attach to Lifeline/standing and running rigging/going aloft.

GENERAL INFORMATION

Important notice: Specific training is essential before use

Read this notice carefully before use. This technical notice illustrates ways of using this product. Only some types of misuse and forbidden uses currently known are represented (shown in crossed out diagrams). Many other types of misuse exist, which are impossible to list or even imagine. Only the techniques shown in the diagrams and not crossed out are authorised. All other uses are expressly excluded; danger of death. In case of doubt or problem of understanding, contact Spinlock. Water sports are dangerous activities which may lead to severe injuries or even death. Adequate training in appropriate safety techniques and methods is essential and acquiring this is your own responsibility. You personally assume all risks and responsibilities for all damage, injury or death which may occur during or following wrong use of our products in any manner whatsoever. If you are not able, or not in a position to assume this responsibility or to take risk do not use this equipment.

USE

This product must only be used by competent and responsible persons, or those placed under the direct and visual control of a competent and responsible person. Check that this product is compatible with other components of your equipment. To prolong the life of this product, care in use is necessary. Avoid rubbing against abrasive surfaces or sharp edges.

The deck safety harness and safety line are intended to prevent the user falling overboard, they do not provide protection against falls from height. In a fall the deck safety harness and safety line may transmit very large forces to the anchorage point.

WARNING: WHEN NOT CORRECTLY FITTED, THIS DECKVEST MAY NOT PERFORM AS A HARNESS AND MAY ENDANGER THE USER.

MAJOR FALLS

In the event that your full bodyweight is dropped a distance and then stopped, do not continue to use this product. Even if no external changes

visible, internal damage may have reduced its strength and its margin of safety. Do not hesitate to contact Spinlock in case of doubt.

CLEANING, MAINTENANCE, STORAGE

Clean by hand or in a machine set for delicate material wash and rinse in clean water (maximum temperature 30° C). Dry in a cool, ventilated dark room. Grease spots may be removed with trichlorethylene. Webbing shrinks very slightly in drying. Always carry and store your Harness in its bag. Though UV protected, this product is best stored away from direct light, in a well ventilated place away from extreme temperatures.

CHEMICALS

All chemicals, (including petrol, battery acid), corrosive materials and solvents should be regarded as harmful. If your Harness comes in contact with chemicals, please notify us, stating the precise chemicals concerned. We will investigate and give our advice.

LIFETIME = SHELF LIFE + USEFUL LIFE

After first use this product should last 3 years. Certain environmental elements will considerably accelerate wear: salt, sand, moisture, chemicals. In exceptional circumstances, wear or damage could occur on the first use which reduces the lifetime of the product to that one single use. However wear or damage could shorten the product life. Shelf-life of this product in good condition is up to 5 years before first use.

TEMPERATURE

Use this product only above a minimum of -40° C and below a maximum of +80° C.

DISINFECTING THE PRODUCT

When necessary, use a disinfectant that is compatible with polyamide, polyester, polycarbonate, PVC etc. Use diluted with clean water at a maximum temperature of 30° C. After soaking for an hour, rinse in clean cold water. Dry slowly, away from direct heat.

RESPONSIBILITY

Spinlock is not responsible for the consequences, direct, indirect or accidental, or any type of damage befalling or resulting from the use of its products.

2 YEAR GUARANTEE

This product is guaranteed for 2 years from the date of manufacture against any faults in materials or manufacture. Exclusions from the guarantee are: normal wear and tear, modifications or alterations, incorrect storage, damage due to accident, negligence and any use for which the product was not designed.

Certain environmental elements will considerably accelerate wear: salt, sand, moisture, chemicals. In exceptional circumstances, wear or damage could occur on the first use which reduces the lifetime of the product to that one single use.